



Hydraulic industrial shock absorbers

Select the correct shock absorber and it will reduce shock vibration and noise. It will improve efficiency and extend machine life.

The function of shock absorber is to convert the kinetic energy of the moving object into heat and dissipate it into the atmosphere. It can stop a moving object smoothly and quietly before heavy impact occurs.

In order to save cost solid buffers such as polyurethane and rubber are often used. These cause noise and transient shock. The use of shock absorbers alleviates this resulting in both increased reliability and production. Additionally the noise reduction means they are environmentally friendly.

MDSC series: Non-adjustable shock absorbers.
Surface treatment: nickel plated: MDSC0806, MDSC1008, MDSC1210; others are black anodized.


MDFC series: Adjustable shock absorbers.

Operating principles of shock absorbers

Shock Absorber's main structure to combine with body, rod, bearing, inner tube, piston, fluid, spring. On impact the piston rod moves into the shock absorber and the hydraulic fluid is pushed into accumulator to produce resistant force, the pressure in the inner tube remains constant throughout the entire impact stroke. Shock Absorbers providing a linear deceleration and brings the impacting object to stop smoothly and quietly. At the end of the impact stroke, the return spring pushes the piston to its original position for next cycle

Order example


MDSC - 1415 - 1 - □ - M14 × 1.5

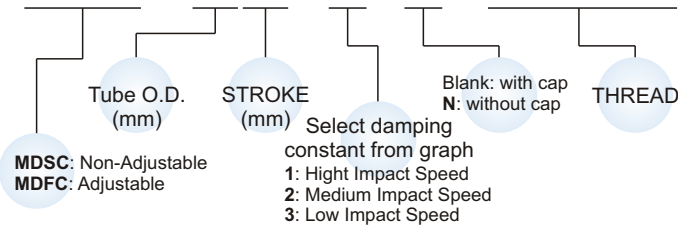


Comparison of shock absorbing of dash pots, PU rubbers, springs and shock absorbers

The springs and PU Rubbers are widespread to use in earlier period, but due to provide non-linear deceleration and to result in strong resistance, all the kinetic energy of moving objects is not absorption and produce counter pressure, this is in low efficiency.

If linear deceleration is necessary for a moving object. Mindman Shock Absorber is your best choice.




Main structures

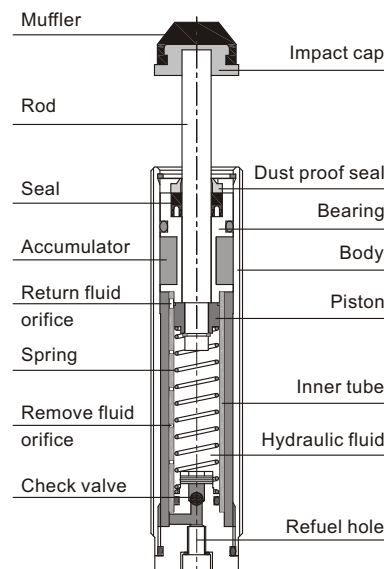

Specification

| Order no. | Stroke (mm) | Max. Nm per hour (Nm) | Effective max. we (kg) | Max. impact speed (m/s) | Max. Nm per hour (Nm) | Operating temp. (°C) |
|-------------|-------------|-----------------------|------------------------|-------------------------|-----------------------|----------------------|
| MDSC-0806-1 | 6 | 1.8 | 0.9 ~ 5.6 | 2.0 | 2,400 | -10~+70 |
| MDSC-0806-2 | 6 | 1.8 | 2.5 ~ 10 | 1.2 | 2,400 | -10~+70 |
| MDSC-0806-3 | 6 | 1.8 | 5.6 ~ 22.5 | 0.8 | 2,400 | -10~+70 |
| MDSC-1008-1 | 8 | 3.2 | 0.9 ~ 4.4 | 2.6 | 5,760 | -10~+70 |
| MDSC-1008-2 | 8 | 3.2 | 2.8 ~ 10 | 1.5 | 5,760 | -10~+70 |
| MDSC-1008-3 | 8 | 3.2 | 10 ~ 40 | 0.8 | 5,760 | -10~+70 |
| MDSC-1210-1 | 10 | 6 | 1.8 ~ 12 | 2.6 | 10,800 | -10~+70 |
| MDSC-1210-2 | 10 | 6 | 5.3 ~ 18.7 | 1.5 | 10,800 | -10~+70 |
| MDSC-1210-3 | 10 | 6 | 12 ~ 75 | 0.8 | 10,800 | -10~+70 |
| MDSC-1412-1 | 12 | 16 | 4.7 ~ 32 | 2.6 | 28,800 | -10~+70 |
| MDSC-1412-2 | 12 | 16 | 14 ~ 50 | 1.5 | 28,800 | -10~+70 |
| MDSC-1412-3 | 12 | 16 | 56 ~ 200 | 0.8 | 28,800 | -10~+70 |
| MDSC-1415-1 | 15 | 20 | 5.9 ~ 27.8 | 2.6 | 36,000 | -10~+70 |
| MDSC-1415-2 | 15 | 20 | 17.8 ~ 62.5 | 1.5 | 36,000 | -10~+70 |
| MDSC-1415-3 | 15 | 20 | 62.5 ~ 250 | 0.8 | 36,000 | -10~+70 |
| MDSC-1425-1 | 25 | 28 | 4.6 ~ 25 | 3.5 | 58,800 | -10~+70 |
| MDSC-1425-2 | 25 | 28 | 14 ~ 87.5 | 2.0 | 58,800 | -10~+70 |
| MDSC-1425-3 | 25 | 28 | 25 ~ 350 | 1.5 | 58,800 | -10~+70 |

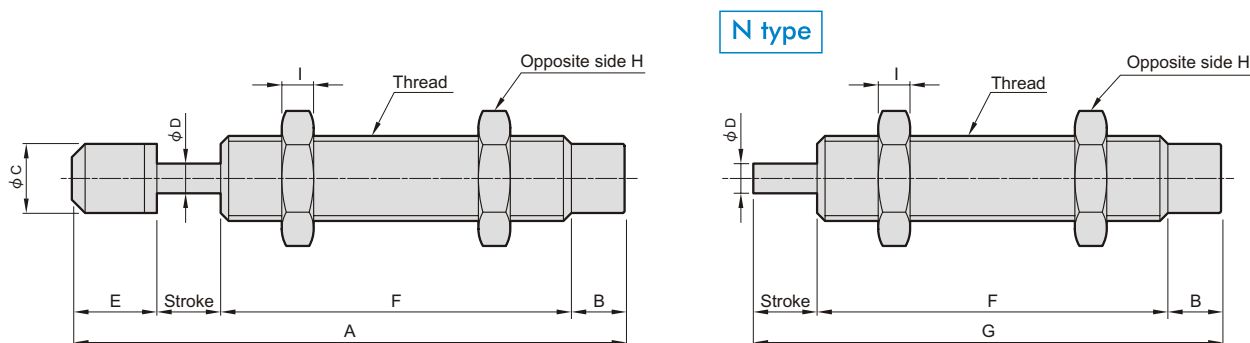


Dimensions


| Order no. | Thread | Stroke (mm) | A | B | C | D | E | F | G | H | I | Weight (g) |
|-------------|----------------|-------------|-------|-----|------|-----|------|------|------|------|---|------------|
| MDSC-0806 | M 8×1.0 | 6 | 53 | 5 | 6.5 | 2.8 | 8.5 | 33.5 | — | 11 | 3 | 12 |
| MDSC-0806-N | M 8×1.0 | 6 | — | 5 | — | 2.8 | — | 33.5 | 44.5 | 11 | 3 | 11 |
| MDSC-1008 | M 10×1.0 | 8 | 62 | 5 | 8.5 | 3 | 8.5 | 40.5 | — | 12.7 | 3 | 20 |
| MDSC-1008-N | M 10×1.0 | 8 | — | 5 | — | 3 | — | 40.5 | 53.5 | 12.7 | 3 | 19 |
| MDSC-1210 | M 12×1.0 | 10 | 72 | 4.5 | 10.5 | 3 | 9.5 | 48 | — | 14 | 4 | 36 |
| MDSC-1210-N | M 12×1.0 | 10 | — | 4.5 | — | 3 | — | 48 | 62.5 | 14 | 4 | 34 |
| MDSC-1412 | M 14×1.5 | 12 | 92.7 | 8 | 12.2 | 3.5 | 13.4 | 59.3 | — | 19 | 6 | 66 |
| MDSC-1412-N | M 14×1.5 | 12 | — | 8 | — | 3.5 | — | 59.3 | 79.3 | 19 | 6 | 63 |
| MDSC-1415 | M 14×1.0 / 1.5 | 15 | 103.4 | 8 | 12.2 | 3.5 | 13.4 | 67 | — | 19 | 6 | 79 |
| MDSC-1415-N | M 14×1.0 / 1.5 | 15 | — | 8 | — | 3.5 | — | 67 | 90 | 19 | 6 | 76 |
| MDSC-1425 | M 14×1.0 / 1.5 | 25 | 133.4 | 8 | 12.2 | 3.5 | 13.4 | 87 | — | 19 | 6 | 90 |
| MDSC-1425-N | M 14×1.0 / 1.5 | 25 | — | 8 | — | 3.5 | — | 87 | 120 | 19 | 6 | 86 |

Specification

| Order no. | Stroke (mm) | Max. Nm per hour (Nm) | Effective max. we (kg) | Max. impact speed (m/s) | Max. Nm per hoir (Nm) | Operating temp. (°C) |
|-------------|-------------|-----------------------|------------------------|-------------------------|-----------------------|----------------------|
| MDSC-2020-1 | 20 | 35 | 6.8 ~ 27 | 3.2 | 42,000 | -10~+70 |
| MDSC-2020-2 | 20 | 35 | 17.5 ~ 70 | 2.0 | 42,000 | -10~+70 |
| MDSC-2020-3 | 20 | 35 | 48.6 ~ 777 | 1.2 | 42,000 | -10~+70 |
| MDSC-2030-1 | 30 | 46 | 9 ~ 36 | 3.2 | 55,200 | -10~+70 |
| MDSC-2030-2 | 30 | 46 | 23 ~ 92 | 2.0 | 55,200 | -10~+70 |
| MDSC-2030-3 | 30 | 46 | 64 ~ 575 | 1.2 | 55,200 | -10~+70 |
| MDSC-2050-1 | 50 | 62 | 10.1 ~ 124 | 3.5 | 63,240 | -10~+70 |
| MDSC-2050-2 | 50 | 62 | 18.3 ~ 253 | 2.6 | 63,240 | -10~+70 |
| MDSC-2050-3 | 50 | 62 | 55 ~ 496 | 1.5 | 63,240 | -10~+70 |

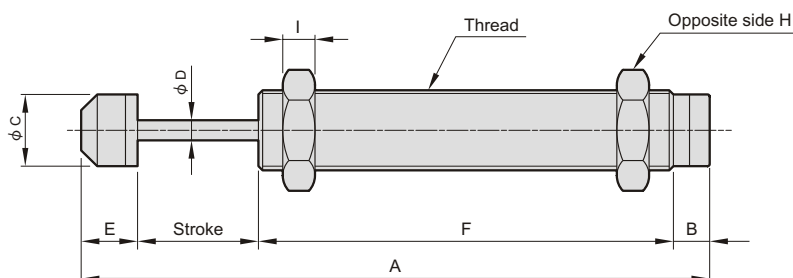

N type

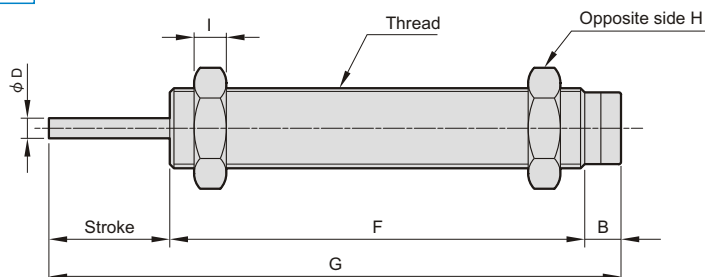


Dimensions

| Order no. | Thread | Stroke (mm) | A | B | C | D | E | F | G | H | I | Weight (g) |
|-------------|----------|-------------|-------|---|------|---|----|-------|-----|----|---|------------|
| MDSC-2020 | M 20×1.5 | 20 | 130 | 9 | 17.8 | 5 | 16 | 85 | — | 26 | 8 | 200 |
| MDSC-2020-N | M 20×1.5 | 20 | — | 9 | — | 5 | — | 85 | 114 | 26 | 8 | 196 |
| MDSC-2030 | M 20×1.5 | 30 | 158 | 9 | 17.8 | 5 | 16 | 103 | — | 26 | 8 | 221 |
| MDSC-2050 | M 20×1.5 | 50 | 222.5 | 9 | 17.8 | 5 | 16 | 147.5 | — | 26 | 8 | 293 |


Specification

| Order no. | Stroke (mm) | Max. Nm per hour (Nm) | Effective max. we (kg) | Max. impact speed (m/s) | Max. Nm per hour (Nm) | Operating temp. (°C) |
|-------------|-------------|-----------------------|------------------------|-------------------------|-----------------------|----------------------|
| MDSC-2525-1 | 25 | 78 | 15 ~ 69 | 3.2 | 70,200 | -10~+70 |
| MDSC-2525-2 | 25 | 78 | 39 ~ 433 | 2.0 | 70,200 | -10~+70 |
| MDSC-2525-3 | 25 | 78 | 108 ~ 1733 | 1.2 | 70,200 | -10~+70 |
| MDSC-2540-1 | 40 | 122 | 20 ~ 108 | 3.5 | 87,840 | -10~+70 |
| MDSC-2540-2 | 40 | 122 | 50 ~ 381 | 2.2 | 87,840 | -10~+70 |
| MDSC-2540-3 | 40 | 122 | 244 ~ 1991 | 1.0 | 87,840 | -10~+70 |
| MDSC-2550-1 | 50 | 140 | 20 ~ 124 | 3.7 | 100,800 | -10~+70 |
| MDSC-2550-2 | 50 | 140 | 48 ~ 438 | 2.4 | 100,800 | -10~+70 |
| MDSC-2550-3 | 50 | 140 | 194 ~ 2286 | 1.2 | 100,800 | -10~+70 |
| MDSC-2580-1 | 80 | 198 | 24.7 ~ 99 | 4 | 118,800 | -10~+70 |
| MDSC-2580-2 | 80 | 198 | 44 ~ 396 | 3.0 | 118,800 | -10~+70 |
| MDSC-2580-3 | 80 | 198 | 176 ~ 1584 | 1.5 | 118,800 | -10~+70 |
| MDSC-2725-1 | 25 | 78 | 15 ~ 69 | 3.2 | 70,200 | -10~+70 |
| MDSC-2725-2 | 25 | 78 | 39 ~ 433 | 2.0 | 70,200 | -10~+70 |
| MDSC-2725-3 | 25 | 78 | 108 ~ 1733 | 1.2 | 70,200 | -10~+70 |
| MDSC-3660-1 | 60 | 260 | 57 ~ 231 | 3.0 | 124,800 | -10~+70 |
| MDSC-3660-2 | 60 | 260 | 130 ~ 813 | 2.0 | 124,800 | -10~+70 |
| MDSC-3660-3 | 60 | 260 | 520 ~ 3250 | 1.0 | 124,800 | -10~+70 |


MDSC-2525 MDSC-2550 MDSC-2725

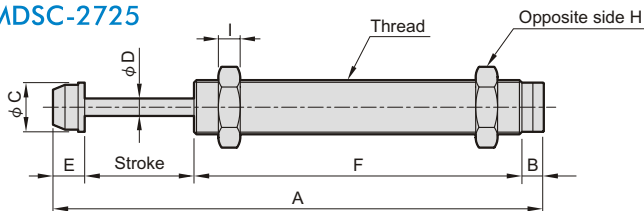


MDSC-2540 MDSC-3660

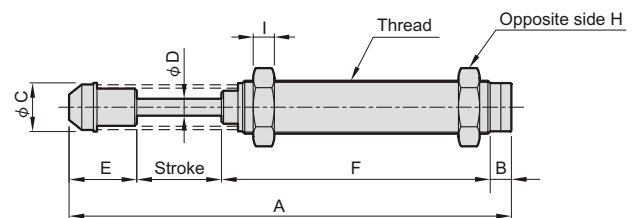

N type

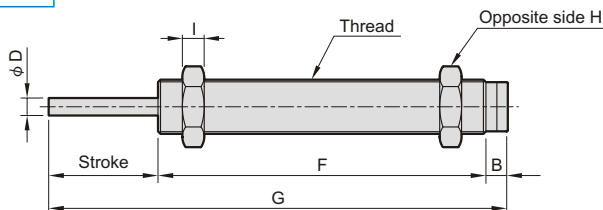

MDSC-2580

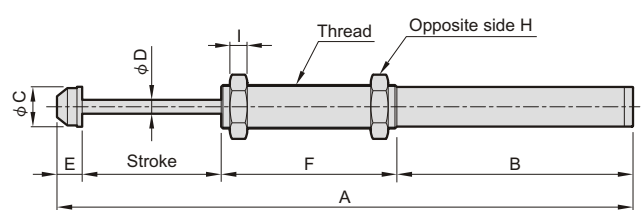


Dimensions


| Order no. | Thread | Stroke (mm) | A | B | C | D | E | F | G | H | I | Weight (g) |
|-------------|----------------|-------------|-------|-----|----|----|------|-------|-----|----|----|------------|
| MDSC-2525 | M 25×1.5 / 2.0 | 25 | 152.6 | 10 | 23 | 8 | 16.6 | 101 | — | 32 | 10 | 341 |
| MDSC-2525-N | M 25×1.5 / 2.0 | 25 | — | 10 | — | 8 | — | 101 | 136 | 32 | 10 | 336 |
| MDSC-2540 | M 25×1.5 / 2.0 | 40 | 211 | 10 | 23 | 8 | 34 | 127 | — | 32 | 10 | 430 |
| MDSC-2550 | M 25×1.5 / 2.0 | 50 | 226.6 | 10 | 23 | 8 | 16.6 | 150 | — | 32 | 10 | 430 |
| MDSC-2580 | M 25×1.5 / 2.0 | 80 | 333.6 | 137 | 23 | 8 | 16.6 | 100 | — | 32 | 10 | 578 |
| MDSC-2725 | M 27×3.0 / 1.5 | 25 | 152.6 | 10 | 23 | 8 | 14.5 | 101 | — | 32 | 10 | 335 |
| MDSC-2725-N | M 27×3.0 / 1.5 | 25 | — | 10 | — | 8 | — | 101 | 136 | 32 | 10 | 330 |
| MDSC-3660 | M 36×1.5 | 60 | 247 | 11 | 36 | 10 | 22.5 | 153.5 | — | 46 | 15 | 1074 |

Specification

| Order no. | Stroke (mm) | Max. Nm per hour (Nm) | Effective max. we (kg) | Max. impact speed (m/s) | Max. Nm per hoir (Nm) | Operating temp. (°C) |
|-----------|-------------|-----------------------|------------------------|-------------------------|-----------------------|----------------------|
| MDFC-1410 | 10 | 15 | 2.9 ~ 120 | 3.2 | 27,000 | -10~+70 |
| MDFC-2016 | 16 | 28 | 5.4 ~ 224 | 3.2 | 33,600 | -10~+70 |
| MDFC-2020 | 20 | 35 | 6.8 ~ 280 | 3.2 | 42,000 | -10~+70 |
| MDFC-2525 | 25 | 78 | 15 ~ 624 | 3.2 | 70,200 | -10~+70 |
| MDFC-2550 | 50 | 140 | 27 ~ 1,120 | 3.2 | 100,800 | -10~+70 |
| MDFC-2725 | 25 | 78 | 15 ~ 624 | 3.2 | 70,200 | -10~+70 |

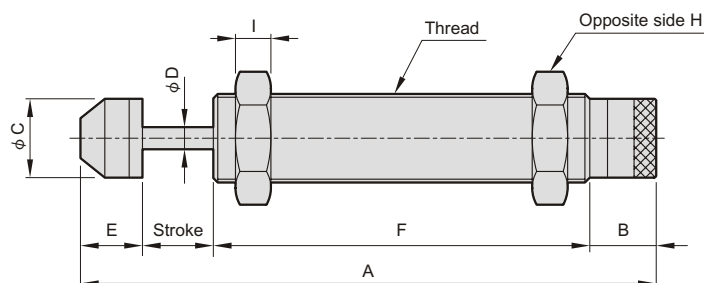

N type

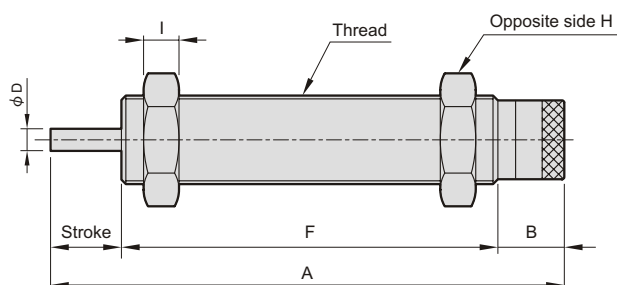


Dimensions

| Order no. | Thread | Stroke (mm) | A | B | C | D | E | F | H | I | Weight (g) |
|-------------|----------------|-------------|-------|------|------|-----|------|-----|----|-----|------------|
| MDFC-1410 | M 14×1.0 / 1.5 | 10 | 101.9 | 11.5 | 12.2 | 3.5 | 13.4 | 67 | 19 | 6 | 81 |
| MDFC-1410-N | M 14×1.0 / 1.5 | 10 | 88.5 | 11.5 | — | 3.5 | — | 67 | 19 | 6 | 78 |
| MDFC-2016 | M 20×1.5 | 16 | 132 | 15 | 17.8 | 5 | 16 | 85 | 26 | 8 | 218 |
| MDFC-2016-N | M 20×1.5 | 16 | 116 | 15 | — | 5 | — | 85 | 26 | 8 | 214 |
| MDFC-2020 | M 20×1.5 | 20 | 136 | 15 | 17.8 | 5 | 16 | 85 | 26 | 8 | 219 |
| MDFC-2020-N | M 20×1.5 | 20 | 120 | 15 | — | 5 | — | 85 | 26 | 8 | 215 |
| MDFC-2525 | M 25×1.5 / 2.0 | 25 | 158.1 | 15.5 | 23 | 8 | 16.6 | 101 | 32 | 10 | 361 |
| MDFC-2525-N | M 25×1.5 / 2.0 | 25 | 141.5 | 15.5 | — | 8 | — | 101 | 32 | 10 | 356 |
| MDFC-2550 | M 25×1.5 / 2.0 | 50 | 232.1 | 15.5 | 23 | 8 | 16.6 | 150 | 32 | 10 | 470 |
| MDFC-2725 | M 27×1.5 / 3.0 | 25 | 158.1 | 15.5 | 23 | 8 | 16.6 | 101 | 32 | 6.5 | 355 |
| MDFC-2725-N | M 27×1.5 / 3.0 | 25 | 141.5 | 15.5 | — | 8 | — | 101 | 32 | 6.5 | 350 |


Specification

| Order no. | Stroke (mm) | Max. Nm per hour (Nm) | Effective max. we (kg) | Max. impact speed (m/s) | Max. Nm per hoir (Nm) | Operating temp. (°C) |
|-----------|-------------|-----------------------|------------------------|-------------------------|-----------------------|----------------------|
| MDFC-2540 | 40 | 122 | 23.8 ~ 976 | 3.2 | 87,840 | -10~+70 |
| MDFC-3625 | 25 | 110 | 21 ~ 880 | 3.2 | 52,800 | -10~+70 |
| MDFC-3650 | 50 | 220 | 43 ~ 1,760 | 3.2 | 105,600 | -10~+70 |

MDFC-2540

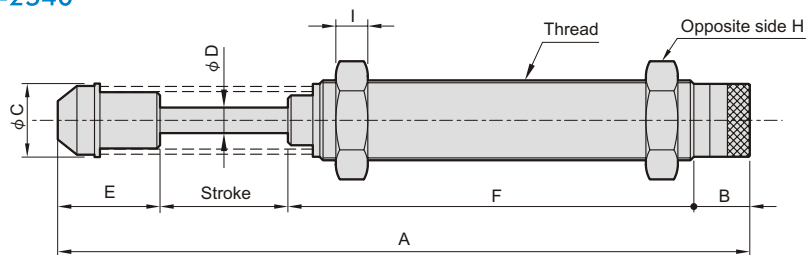


MDFC-3625 MDFC-3650

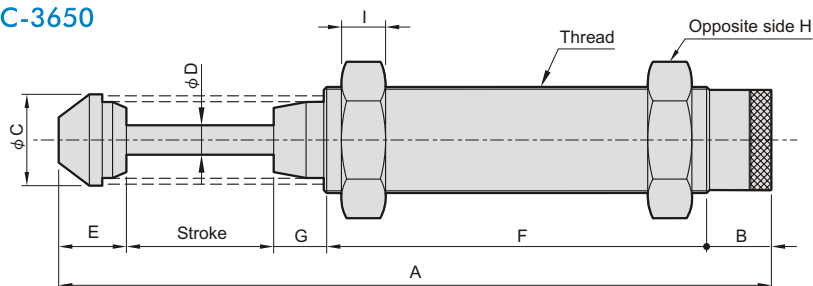

Dimensions

| Order no. | Thread | Stroke (mm) | A | B | C | D | E | F | G | H | I | Weight (g) |
|-----------|------------------|-------------|-------|------|----|----|------|-------|------|----|----|------------|
| MDFC-2540 | M 25 × 1.5 / 2.0 | 40 | 216.5 | 15.5 | 23 | 8 | 34 | 127 | — | 32 | 10 | 460 |
| MDFC-3625 | M 36 × 1.5 | 25 | 186 | 18 | 36 | 10 | 22.5 | 106.5 | 14 | 46 | 15 | 974 |
| MDFC-3650 | M 36 × 1.5 | 50 | 248 | 18 | 36 | 10 | 22.5 | 138 | 19.5 | 46 | 15 | 1144 |

Installation of stop collar and nut

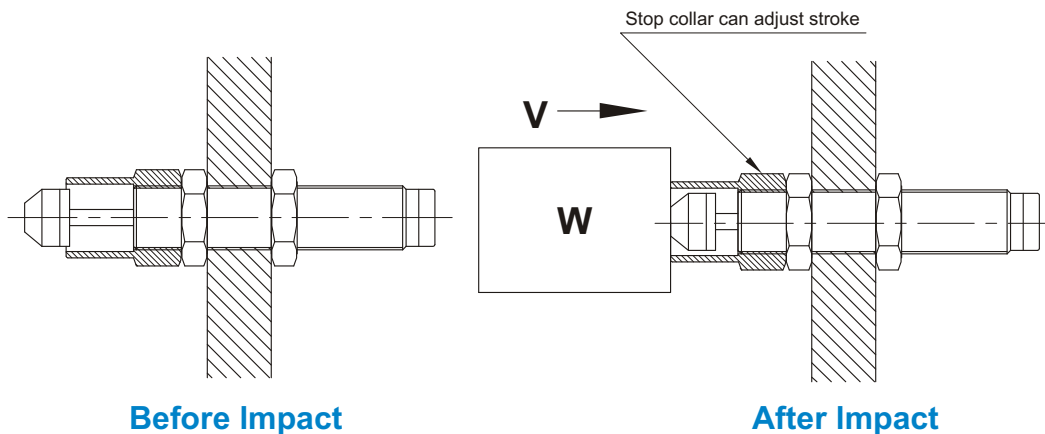

Accessories

| | |
|---|--|
| <p>STC-08</p> <p>Match: MDSC-0806</p> | <p>STC-20</p> <p>Match: MDSC-2020 MDSC-2050 MDFC-2016 MDFC-2020</p> |
| <p>STC-10</p> <p>Match: MDSC-1008</p> | <p>STC-25</p> <p>Match: MDSC-2525 MDFC-2525</p> |
| <p>STC-12</p> <p>Match: MDSC-1210</p> | <p>STC-25L</p> <p>Match: MDSC-2540 MDSC-2550 MDSC-2580 MDFC-2540 MDFC-2550</p> |
| <p>STC-14</p> <p>Match: MDSC-1412 MDSC-1415 MDFC-1410</p> | <p>STC-36</p> <p>Match: MDSC-3660 MDFC-3625 MDFC-3650</p> |